
DC 4015




SIZE:
40x40x15mm
CONSTRUCTION:
Glass Fiber reinforced plastic
Impeller and housing PBT are UL 94V-0 rating
OPERATING TEMPERATURE:
Ball bearing -10°C to +70°C
CycleSeal bearing -10°C to +70°C
INSULATION RESISTANCE:
10meg Ohm min, at 500 VDC
(between frame and terminal)
DIELECTRIC STRENGTH:
5mA max, at 500 VAC 60Hz one minute
(between frame and terminal)
FUNCTION OPTIONS:
FG,RD,PWM,Auto Restart,Polarity Protection

Dimensions Drawing

Unit:mm

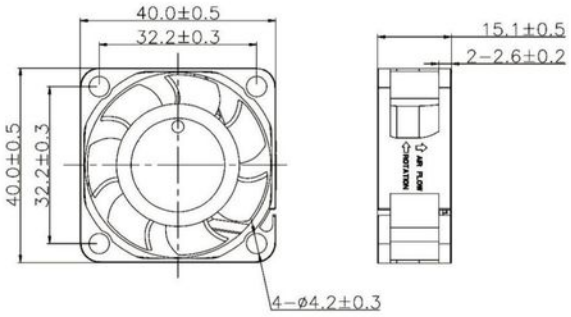

Characteristic Curves

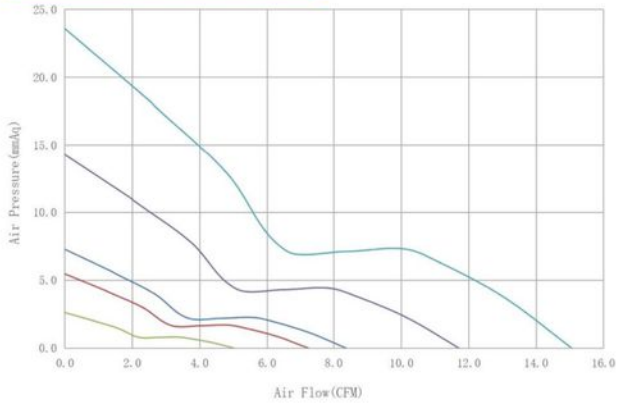

13500RPM 10500RPM 7500RPM 6500RPM 4500RPM

Specifications

Model	Bearing Type	Rated Voltage	Current	Speed	Air Flow	Static Pressure	Noise Level	Weight
		VDC	A	RPM	CFM	mmH_2O	dBA	g
YDH4015X05	C or B	5	0.22	7500	8.36	7.28	28.73	23.5
YDM4015X05	C or B	5	0.15	6500	7.25	5.47	25.63	23.5
YDL4015X05	C or B	5	0.09	4500	5.02	2.62	17.64	23.5
YDU4015B12	B	12	0.32	13500	15.61	23.38	41.50	23.5
YDD4015B12	B	12	0.20	10500	12.14	14.14	36.50	23.5
YDH4015X12	C or B	12	0.07	7500	8.36	7.28	28.73	23.5
YDM4015X12	C or B	12	0.05	6500	7.25	5.47	25.63	23.5
YDL4015X12	C or B	12	0.04	4500	5.02	2.62	17.64	23.5
YDU4015B24	B	24	0.16	13500	15.61	23.38	41.50	23.5
YDD4015B24	B	24	0.10	10500	12.14	14.14	36.50	23.5
YDH4015X24	C or B	24	0.05	7500	8.36	7.28	28.73	23.5
YDM4015X24	C or B	24	0.04	6500	7.25	5.47	25.63	23.5
YDL4015X24	C or B	24	0.03	4500	5.02	2.62	17.64	23.5

1.Specifications subject to change without notice;
2.Design and provide products according to client's requirements.